



RUBINETTERIE IN BRONZO


VALVOLE IN BRONZO A MANICOTTI




art. 16



art. 17



art. 18



art. 19

ART. 16 SERIE PN 25

VALVOLE A GLOBO «UNION BONNET»
SEDE METALLICA

DN	L	H	V	Kg.
1/4	52	88	50	0,34
3/8	52	88	50	0,33
1/2	63	94	55	0,48
3/4	79	100	65	0,78
1"	89	124	70	1,10
1" 1/4	102	135	75	1,70
1" 1/2	120	145	80	2,50
2"	137	162	90	3,70

ART. 17 SERIE PN 16

VALVOLE A GLOBO SEDE METALLICA
O TEFLON.

DN	L	H	V	Kg.
1/4	54	78	50	0,29
3/8	54	78	50	0,28
1/2	58	83	55	0,37
3/4	70	96	65	0,60
1"	80	105	70	0,85
1" 1/4	95	120	75	1,35
1" 1/2	105	134	80	1,80
2"	128	160	90	2,75
2" 1/2	155	215	125	5,50
3"	175	245	150	7,70
4"	200	270	150	10,7

ART. 18 SERIE PN 16

VALVOLE DI REGOLAZIONE CON
OTTURATORE A SPILLO.


DN	L	H	V	Kg.
1/4	54	78	50	0,29
3/8	54	78	50	0,28
1/2	58	83	55	0,37
3/4	70	96	65	0,60
1"	80	105	70	0,85
1" 1/4	95	120	75	1,35
1" 1/2	105	134	80	1,80
2"	128	160	90	2,75
2" 1/2	155	215	125	5,50
3"	175	245	150	7,70
4"	200	270	150	10,7

ART. 19 SERIE PN 16


VALVOLE A SQUADRA SEDE METALLICA
O TEFLON.

DN	L	H	V	Kg.
1/4	31	67	50	0,26
3/8	34	70	50	0,30
1/2	35	72	55	0,31
3/4	41	87	65	0,50
1"	46	95	70	0,85
1" 1/4	55	110	75	1,20
1" 1/2	62	120	80	1,50
2"	75	145	90	2,50
2" 1/2	80	205	125	4,70
3"	95	220	150	6,00
4"	113	245	150	9,80


VALVOLE IN BRONZO FLANGIATE




art. 40



art. 42



art. 43



art. 44

ART. 40 SERIE PN 16

VALVOLE A GLOBO SEDE METALLICA
O TEFLON.

DN	L	H	D	Kg.
15	70	76	95	1,35
20	90	93	105	2,00
25	98	110	115	2,50
32	110	120	140	3,80
40	130	130	150	4,60
50	150	160	165	6,40
65	190	230	185	10,5
80	210	250	200	13,0
100	220	280	220	18,5

ART. 42 SERIE PN 16

VALVOLE A SQUADRA SEDE METALLICA
O TEFLON.

DN	L	H	D	Kg.
15	62	76	95	1,80
20	65	90	105	2,15
25	72	108	115	3,10
32	85	115	140	4,50
40	90	120	150	5,20
50	103	160	165	7,50
65	116	210	185	10,7
80	122	230	200	12,8
100	140	250	220	16,0

ART. 43 SERIE PN 16

SARACINESCA A VITE INTERNA.


DN	L	H	D	Kg.
15	80	87	95	1,20
20	80	87	105	1,78
25	85	95	115	2,20
32	100	117	140	3,40
40	110	132	150	4,20
50	125	152	165	5,60
65	140	184	185	7,40
80	150	220	200	10,0
100	170	252	220	15,8
125	200	312	250	22,1
150	210	370	285	31,5

ART. 44 SERIE PN 16


FILTRI RACCOLTORI DI IMPURITÀ
ELEMENTO FILTRANTE ACCIAIO INOX.

DN	L	H	D	Kg.
15	105	45	95	1,70
20	115	55	105	2,00
25	140	60	115	2,50
32	145	70	140	4,20
40	170	85	150	5,20
50	185	95	165	6,80
65	205	115	185	8,80
80	220	130	200	10,5
100	255	155	220	14,0


VALVOLE DI RITEGNO IN BRONZO




art. 45



art. 47



art. 48



art. 49

ART. 45 SERIE PN 16

VALVOLE DI RITEGNO SEDE METALLICA O TEFLON.

DN	L	H	D	Kg.
15	70	47	95	1,20
20	90	52	105	1,80
25	98	57	115	2,25
32	110	70	140	3,50
40	130	75	150	4,30
50	150	82	165	5,80
65	190	92	185	9,20
80	210	100	200	11,5
100	220	110	220	16,5

ART. 47 SERIE PN 16

VALVOLE DI RITEGNO A SQUADRA SEDE METALLICA O TEFLON.

DN	L	H	D	Kg.
15	62	30	95	1,50
20	65	35	105	2,00
25	72	43	115	2,90
32	85	48	140	4,30
40	90	50	150	5,00
50	103	60	165	7,00
65	116	75	185	9,50
80	122	85	200	11,5
100	140	95	220	14,6

ART. 48 SERIE PN 16

VALVOLE DI RITEGNO A BATTENTE SEDE METALLICA.


DN	L	H	D	Kg.
15	90	53	95	1,50
20	90	53	105	1,80
25	100	58	115	2,50
32	110	70	140	3,65
40	130	75	150	4,50
50	150	83	165	5,70
65	175	98	185	9,40
80	180	110	200	10,4
100	200	112	220	13,0

ART. 49 SERIE PN 16


VALVOLE DI RITEGNO SEDE METALLICA O TEFLON.

DN	L	H		Kg.
1/4	54	30		0,24
3/8	54	30		0,22
1/2	58	30		0,29
3/4	70	38		0,49
1"	80	45		0,72
1" 1/4	95	56		1,15
1" 1/2	105	60		1,40
2"	128	70		2,20
2" 1/2	155	85		4,35
3"	175	95		6,20
4"	200	110		10,25

FILTRI E VALVOLE



art. 78



art. 76

ART. 78 SERIE PN 10

FILTRI IN BRONZO A MANICOTTI CON ELEMENTO FILTRANTE IN ACCIAIO INOX.


DN	L	H		Kg.
3/8	55	40		0,19
1/2	59	44		0,24
3/4	69	50		0,35
1"	82	60		0,48
1" 1/4	98	73		0,83
1" 1/2	109	80		0,94
2"	151	115		2,35
3"	172	130		3,70
4"	219	170		6,65

ART. 76 SERIE PN 16


VALVOLA DI FONDO CON SUCCHERUOLA OTTURATORE IN GOMMA.

DN	L			Kg.
1/2	60			0,12
3/4	77			0,24
1"	85			0,35
1" 1/4	100			0,42
1" 1/2	105			0,60
2"	115			0,82
2" 1/2	140			1,43
3"	150			1,80
4"	185			6,80
5"	250			9,40
6"	300			12,0


VALVOLE DI SICUREZZA A MOLLA ORDINARIE

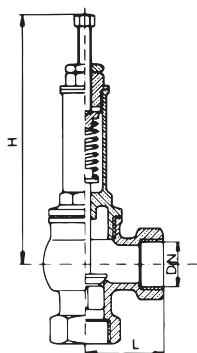


art. 80

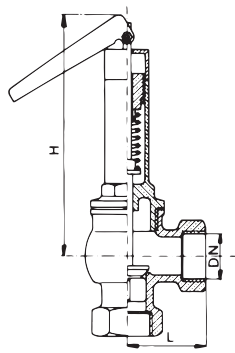

art. 81

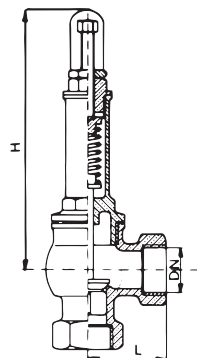

art. 82



art. 83

ART. 80 SERIE PN 16

VALVOLE A SQUADRA SEDE METALLICA O TEFLON.

DN	L	H		Kg.
3/8	33	90		0,37
1/2	35	100		0,39
3/4	42	125		0,63
1"	46	135		1,00
1" 1/4	55	155		1,45
1" 1/2	67	170		2,10
2"	74	185		3,25
2" 1/2	80	220		5,50
3"	90	230		6,80
4"	110	285		13,3

ART. 81 SERIE PN 16

VALVOLE A SQUADRA SEDE TEFLON CON LEVA DI BLOCCAGGIO.

DN	L	H		Kg.
1/2	35	90		0,40
3/4	42	115		0,70
1"	46	125		1,00
1" 1/4	55	140		1,60
1" 1/2	67	160		2,20
2"	74	175		3,45

ART. 82 SERIE PN 16

VALVOLE A VALVOLA CON CAPPUCCIO SEDE METALLICA O TEFLON.


DN	L	H		Kg.
3/8	33	95		0,40
1/2	35	105		0,42
3/4	42	135		0,67
1"	46	140		1,05
1" 1/4	55	160		1,50
1" 1/2	67	180		2,22
2"	74	190		3,40
2" 1/2	80	225		5,70
3"	90	235		7,00
4"	110	310		13,7

ART. 83 SERIE PN 16


VALVOLE A VIA DRITTA SEDE METALLICA O TEFLON.

DN	L	H		Kg.
1/2	58	100		0,40
3/4	70	125		0,70
1"	80	140		1,05
1" 1/4	95	155		1,55
1" 1/2	105	175		2,20
2"	128	190		3,40
2" 1/2	155	225		6,40
3"	175	240		8,55
4"	200	290		13,9

VALVOLE DI SICUREZZA A MOLLA ORDINARIE



art. 90



art. 91

ART. 90 SERIE PN 16

VALVOLE FLANGIATE A SQUADRA SEDE METALLICA O TEFLON.


DN	L	H	D	Kg.
15	60	95	95	1,70
20	65	125	105	2,20
25	75	135	115	3,20
32	85	160	140	4,80
40	90	180	150	6,10
50	105	190	165	8,50
65	115	220	185	12,5
80	120	235	200	14,5
100	140	290	220	20,0

ART. 81 SERIE PN 16


VALVOLE A SQUADRA SEDE TEFLON CON LEVA DI BLOCCAGGIO.

DN	L	H	D	Kg.
15	70	100	95	1,30
20	90	130	105	2,00
25	100	140	115	2,60
32	110	170	140	5,00
40	130	185	150	5,90
50	150	200	165	7,00
65	190	235	185	11,0
80	210	250	200	14,0
100	220	310	220	21,0

RUBINETTI PORTAMANOMETRO



art. 97

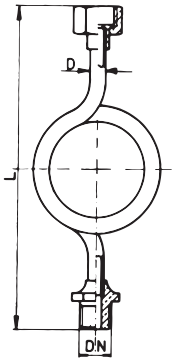

art. 101

ART. 97 SERIE PN 16

RUBINETTI PORTAMANOMETRO
CON PREMISTOPPA E FLANGETTA DI
CONTROLLO TIPO PESANTE.


DN	L	H		Kg.
1/4	77	12		0,40
3/8	79	13		0,40
1/2	79	13		0,42

ART. 101


SERPENTINE A RICCIOLO IN RAME
CROMATE.

DN	L	H		Kg.
1/4	160	8		0,110
3/8	160	8		0,125
1/2	170	8		0,180
3/4	180	8		0,240


INDICATORI DI LIVELLO IN BRONZO

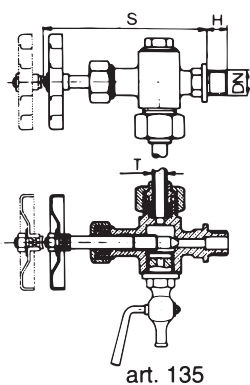

art. 135



art. 137

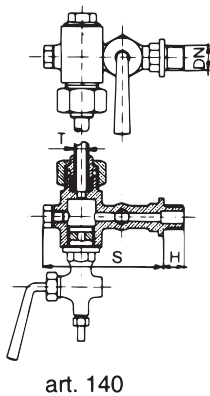

art. 140

ART. 135 SERIE PN 10

INDICATORE DI LIVELLO CON OTTURATORE A SPILLO.

DN	S	H	T	Kg.
1/4	88	12	10	0,50
3/8	97	13	13	0,62
1/2	100	15	13	0,76
1/2	101	15	16	0,78
3/4	116	15	18	1,07
3/4	116	15	20	1,07

ART. 137 SERIE PN 10

INDICATORE DI LIVELLO A PASSAGGIO LIBERO.

DN	S	H	T	Kg.
1/4	34	12	10	0,26
3/8	41	13	13	0,36
1/2	52	15	16	0,54
3/4	78	20	20	1,55
1"	84	20	25	1,90
1" 1/4	95	24	30	3,00

ART. 140 SERIE PN 16

INDICATORE DI LIVELLO A MASCHIO CON PREMISTOPPA.


DN	S	H	T	Kg.
3/8	85	13	10	0,97
1/2	92	20	13	1,33
3/4	109	21	16	2,17
3/4	109	21	18	2,24
3/4	122	25	20	2,96
1"	142	27	25	4,27

ART. 145 SERIE PN 16


INDICATORI DI LIVELLO MASCHIO CON PREMISTOPPA.

T	S	H	D	Kg.
13	72	95	95	2,40
16	84	112	95	3,10
18	84	112	105	3,15
20	94	125	105	4,00


SPIE VISIVE




art. 159



art. 160



art. 161



art. 161/A

ART. 159

SPIE CON CONTROLLO A CUPOLA
PIREX, SFERA MOBILE IN MOPLIN,
PRESS. MAX 5 BAR.

DN	L	H	S	Kg.
3/8	98	52	40	0,71
1/2	95	52	40	0,70
3/4	101	55	40	0,80
1"	106	58	40	0,95

ART. 160 SERIE PN 16

SPIE A SEMPLICE CRISTALLO
TEMPERATO CON ALETTE FISSE.

DN	L	S	Kg.
3/8	98	39	0,76
1/2	95	39	0,75
3/4	101	44	0,90
1"	106	44	0,98
1" 1/4	130	50	1,70
1" 1/2	137	50	2,00
2"	164	63	3,35
2" 1/2	180	82	4,95

ART. 161 SERIE PN 16

SPIE A DOPPIO CRISTALLO TEMPERATO
CON ALETTE FISSE.


DN	L	S	Kg.
3/8	107	44	1,33
1/2	103	44	1,32
3/4	113	44	1,46
1"	117	44	1,67
1" 1/4	125	50	2,47
1" 1/2	135	50	2,80
2"	170	63	4,97
2" 1/2	180	82	6,50

ART. 161/A SERIE PN 16


SPIE A DOPPIO CRISTALLO TEMPERATO
CON SFERA MOBILE IN MOPLIN
RESISTENTE FINO A 150°.

DN	L	S	Kg.
3/8	98	40	1,06
1/2	95	40	1,05
3/4	100	44	1,15
1"	105	44	1,30

SPIE VISIVE



art. 162



art. 163

ART. 162 SERIE PN 16

SPIE IN BRONZO A SEMPLICE CRISTALLO
TEMPERATO CON ALETTE FISSE.


DN	L	S	D	Kg.
15	115	44	95	2,00
20	120	44	105	2,01
25	135	44	115	2,60
32	150	50	140	4,30
40	180	50	150	4,32
50	200	63	165	7,12
65	240	82	185	10,5
80	260	94	200	13,0
100	300	110	220	18,0

ART. 163 SERIE PN 16


SPIE IN BRONZO A DOPPIO CRISTALLO
TEMPERATO CON ALETTE FISSE.

DN	L	S	D	Kg.
15	110	44	95	2,50
20	120	44	105	2,80
25	135	44	115	3,01
32	150	50	140	4,80
40	180	50	150	5,70
50	200	63	165	9,00
65	240	82	185	12,3
80	260	94	200	16,0
100	300	110	220	22,0


RUBINETTI MASCHIO IN BRONZO E GHISA



art. 212



art. 213



art. 215

ART. 212 SERIE PN 6

RUBINETTI A MASCHIO PASSANTE A MANICOTTI A TRE VIE.

DN	L	H		Kg.
1/4	44	28		0,18
3/8	44	33		0,20
1/2	48	33		0,25
3/4	61	40		0,47
1"	71	45		0,65
1" 1/4	81	56		1,05
1" 1/2	90	64		1,35
2"	105	76		2,15

ART. 213 SERIE PN 10

RUBINETTI CON PREMOSTOPPA A DUE VIE.


DN	L	H		Kg.
1/4	50	51		0,23
3/8	54	54		0,30
1/2	64	65		0,45
3/4	73	71		0,65
1"	85	85		0,93
1" 1/4	97	90		1,30
1" 1/2	110	113		2,10
2"	128	126		2,95
2" 1/2	135	130		4,75
3"	155	140		6,50

ART. 215 SERIE PN 16

RUBINETTI IN GHISA OPPURE CON MASCHIO IN BRONZO.

DN	L	H	D	Kg.
15	80	90	95	2,00
20	90	98	105	2,70
25	100	105	115	3,30
32	120	120	140	5,00
40	140	130	150	7,00
50	160	145	165	10,0
65	230	180	185	15,0
80	260	190	200	19,0
100	320	230	220	30,0
125	355	300	250	57,0
150	400	330	285	78,0

INDICATORE DI PASSAGGIO INOX

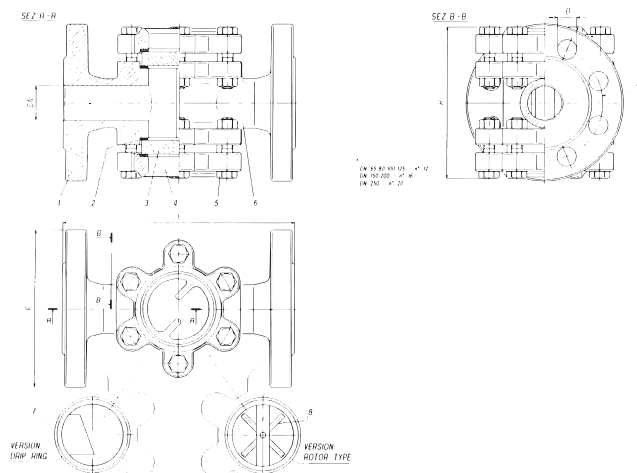

ART. 164/C

DN	L	F	H	Ø A	B	N° FORI
15	130	89	105	61	16	4
20	150	99	106	70	16	4
25	160	108	110	80	16	4
32	180	118	132	89	16	4
40	200	127	140	99	16	4
50	230	152	150	121	19	4
65	290	178	190	140	19	4
80	310	190	210	153	19	4
100	350	229	245	191	19	8
125	400	254	315	216	22	8
150	480	280	340	242	22	8
200	600	343	415	299	22	8
250	730	406	450	362	26	12